


System cable / Systemkabel: HC10-12p. (M16 / SV120-12p.)

Pin on system socket / Pin am Systemstecker HC10-12p	Pin on socket / Pin am Stecker SV120-12p.	Colour identification / Farbkennzeichnung	System name / Systemname
1	A	white / weiß	U-
2	B	brown / braun	U+
3	C	green / grün	OUT0-
4	D	yellow / gelb	OUT0+
5	E	gray / grau	OUT1-
6	F	pink / rosa	OUT1+
7	G	blue / blau	IN0+
8	H	red / rot	IN0-
9	J	black / schwarz	IN1+
10	K	purple / violet	IN1-
11	L	gray-pink / grau-rosa	U+
12	M	red-blue / rot-blau	U-

Order No. / Bestellnummer	Cable type / Kabeltyp	Temperature range / Temperaturbereich	Comments / Bemerkungen
2301A140xm	12x0.14mm ² open ends / offene Enden	stationary / stationär: (-40 ... 80) °C rare motion / wenig bewegt: (-5 ... 70) °C	flame-retardant / schwer entflammbar halogen free / halogenfrei
2301A110xm	12x0.14mm ² to / auf M16 / SV120-12p.	stationary / stationär: (-40 ... 80) °C rare motion / wenig bewegt: (-5 ... 70) °C	flame-retardant / schwer entflammbar halogen free / halogenfrei

xm ... Length [m] / Länge [m]

xm = [5, 10, 20, 25, 30], others on request / andere auf Anfrage

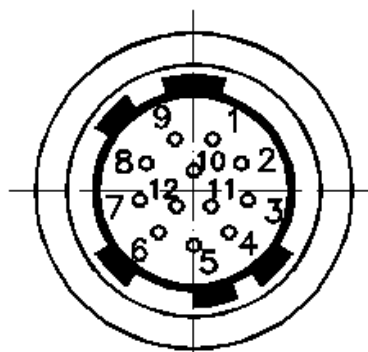

HC10-12p.
(Hirose)



M16 / SV120-12p.
(Lumberg)