
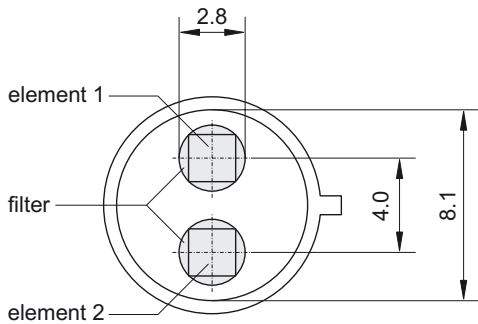
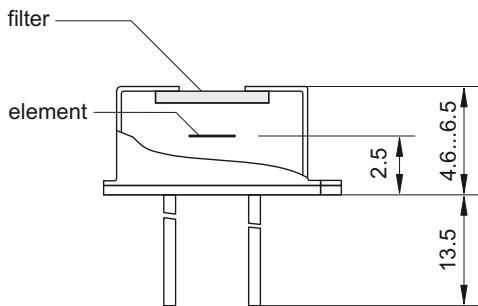


2LTA G2C100





Pyroelectric Dual Channel Detector for measurement application

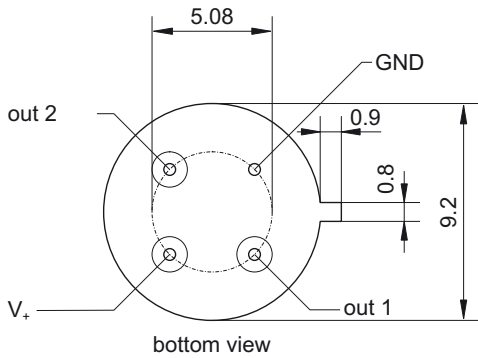

Element size	2 mm × 2 mm
Aperture	2.8 mm
Filter ¹	custom-designed
Responsivity ^{2,3}	> 70000 V/W
Noise ²	< 20000 nV/√Hz
Specific detectivity ^{2,3}	2.5·10 ⁸ cm√Hz/W
Offset voltage	<5 mV
Operating voltage	5 V to 8 V
Housing	TO 39
Operating temperature	-20 to 70 °C
Storage temperature	-20 to 70 °C

¹ Other filters on request. ² Frequency: 10 Hz, ambient temperature: 25 °C.

³ Black body source temperature: 500 K, Filter transmission: 100 %.

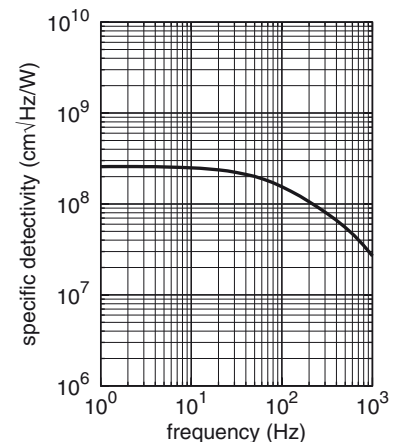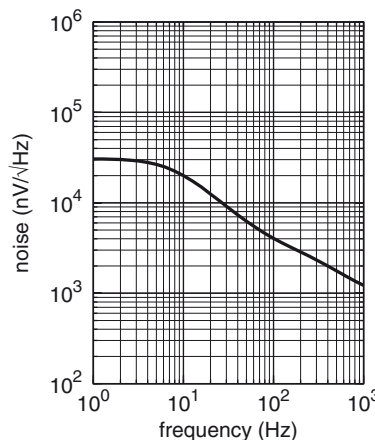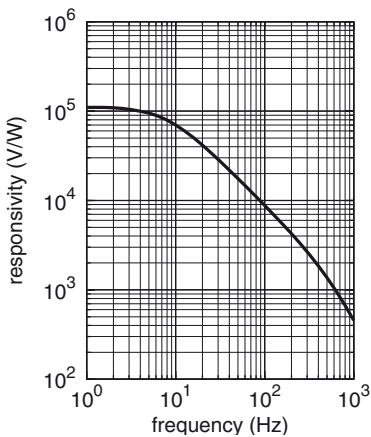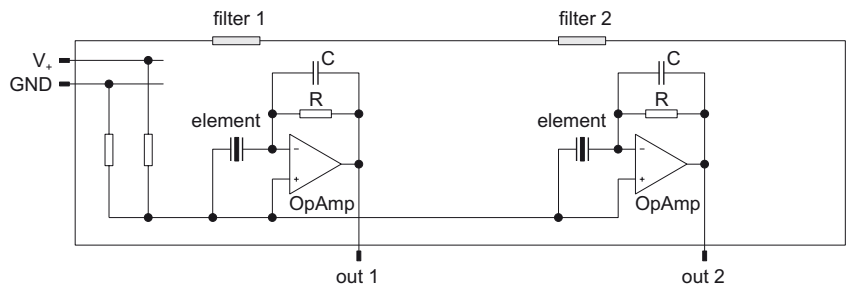

Technische Änderungen vorbehalten. Technical details are subject to change. 24.06.19



Phone: +49 351 896 74-0
 Fax: +49 351 896 74-99
 Email: info@dias-infrared.de
 Internet: www.dias-infrared.com

DIAS Infrared GmbH
 Pforzheimer Straße 21
 01189 Dresden
 Germany